


Dual Station "OVAL" (SETR) Control Wiring Diagram

1st Station
Oval (SETR) Control

W4-** (**=length) 4 conductor, 14 AWG interconnect cable may be used or actuator may be ordered with extended cable i.e. A-BK-13 = 23 ft. (7m), A-BK-24 = 28 ft. (8.5m) connecting to SETR.

Connect SR Communication Cable to both SETR controls.

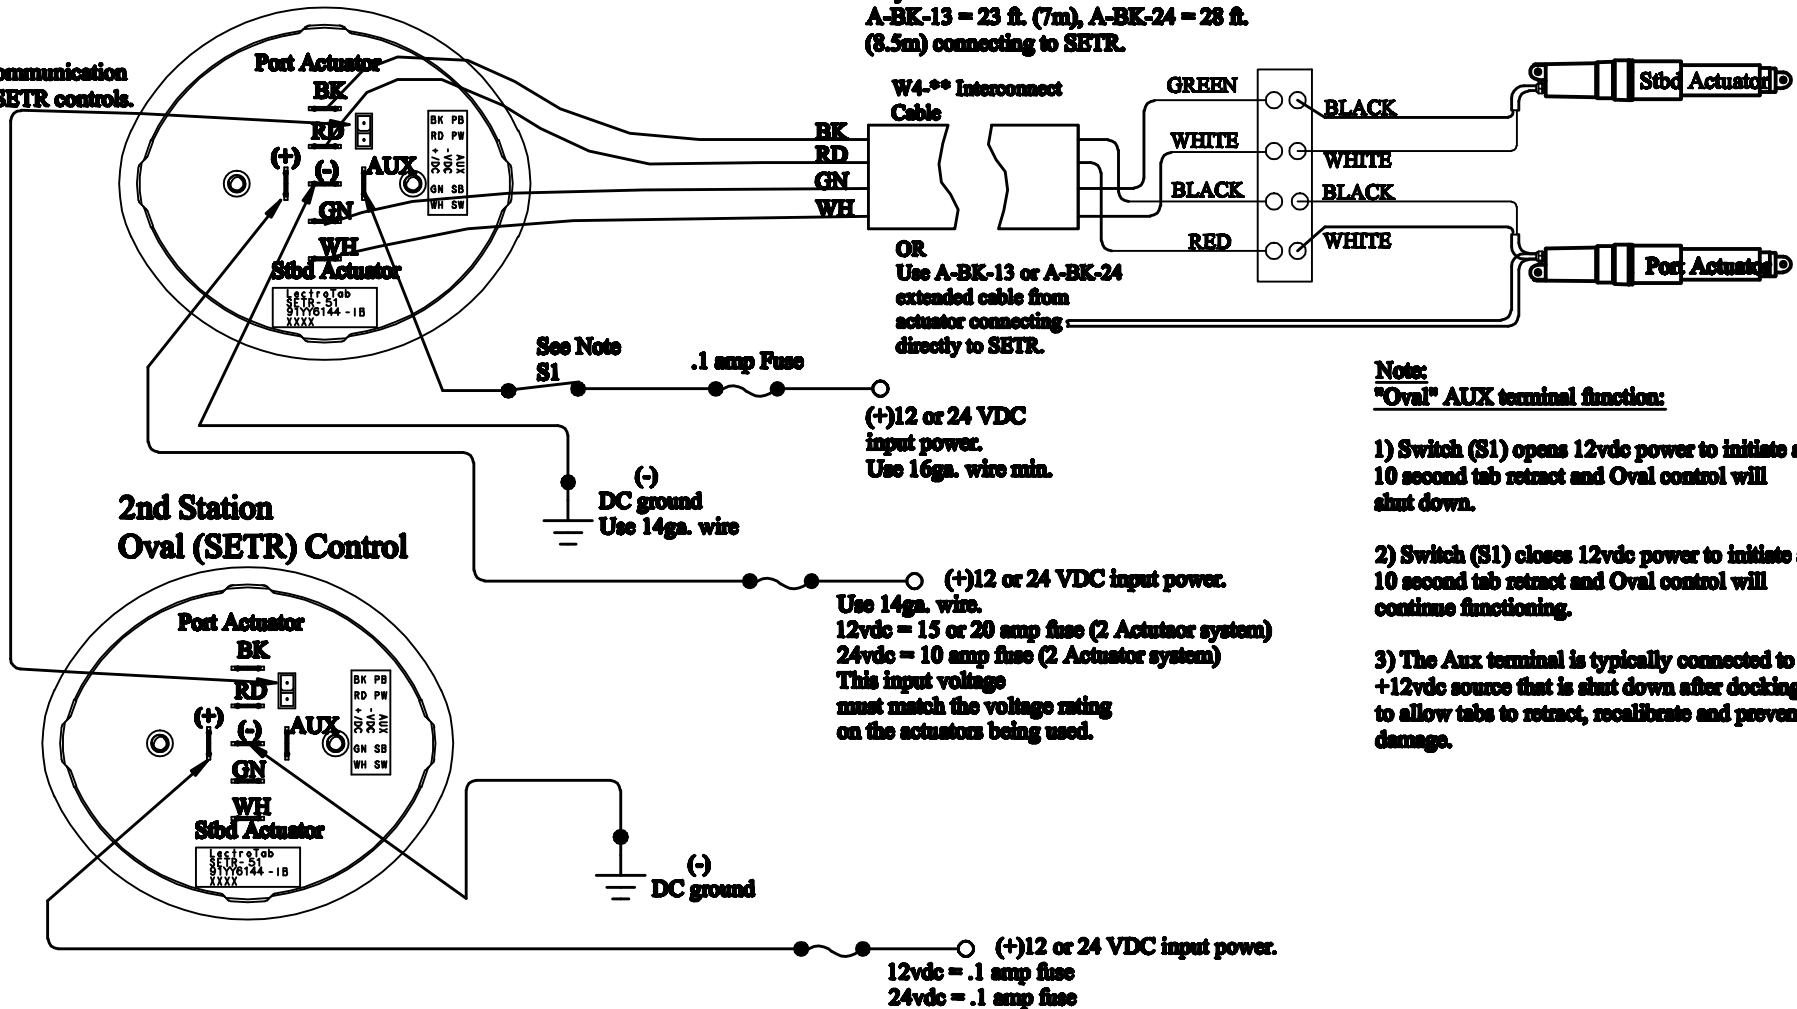

Note:
"Oval" AUX terminal function:

- 1) Switch (S1) opens 12vdc power to initiate a 10 second tab retract and Oval control will shut down.
- 2) Switch (S1) closes 12vdc power to initiate a 10 second tab retract and Oval control will continue functioning.
- 3) The Aux terminal is typically connected to a +12vdc source that is shut down after docking to allow tabs to retract, recalibrate and prevent damage.