

Important Transducer Orientation Information

Your transducer has been redesigned to make installation easier. It is important that you review the following transducer orientation information before starting the transducer installation. This information replaces what is currently shown on page four of the *Bronze Thru-Hull Side Imaging*® *Transducers Installation Guide*.

1. Identify the Port and Starboard Transducers

The two Side Imaging transducers must be installed on the correct side of the boat for proper operation, so it is important that you identify the port transducer and the starboard transducer.

1. Locate the PORT and STARBOARD labels that are attached to the transducer cables.

NOTE: If your transducers do not include port and starboard labels, contact Customer Service for assistance.


2. Confirm Transducer Orientation

1. Look at the bottom of each transducer and locate the arrows and the teardrop.

The transducers must be installed with the arrows and the teardrop pointing away from the centerline of the boat.

The transducers must be installed parallel to the keel of the boat.

The transducer labeled **PORT** must be **installed on the port side of the boat**. The transducer labeled **STARBOARD** must be **installed on the starboard side of the boat**.

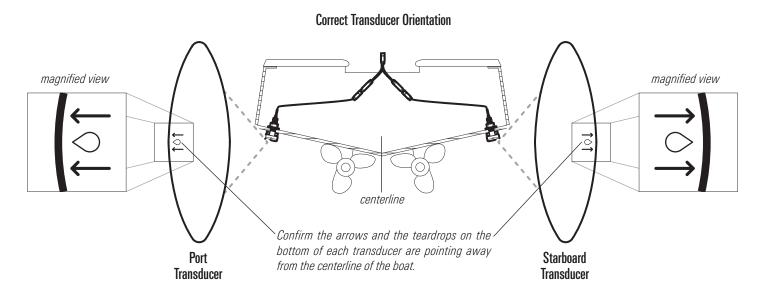

WARNING! Failure to correctly align the transducers according to these specifications will result in incorrect bottom readings and incorrect fish locations.

2. Proceed to the *Bronze Thru-Hull Side Imaging Transducers Installation Guide*.

Contact Humminbird®