

## PERMANENT MOUNT MODELS

Wireless Hand-Held Remote

30004 (white)

30064 (chrome)

30514 (black)

Hard Wired Dash Mount Remote

30204 (white)

30264 (chrome)

30214 (black)

## PORTABLE MODELS

### Magnetic Base

Wireless Hand-Held Remote


30005 (white)

30065 (chrome)

30515 (black)



Stryker LED  
Light Beam Dimensions

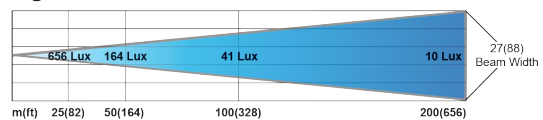

Illuminance (Lux) 656 164 41 10

Peak Beam Intensity: 410,000 Candela

Maximum Beam Distance: 1,280 m / 4,200 ft

Beam Angle: 8°



|  |  |
|--|--|
| <b>Housing:</b>                        | ASA Luran heat resistant<br>High impact, UV resistant material   |
| <b>Gears &amp; Transmission Parts:</b> | Lexan and Brass  |
| <b>Fasteners:</b>                      | Stainless Steel  |
| <b>Motors:</b>                         | Automotive grade 12V D.C. High Torque, R.P.M. 6087<br>Constant Torque 17.133 mN.m/amp, Stall:12.31 mN.m Draw point 4 amps<br>Output: 1.96 watts w/built in stall protection circuitry<br>Built in stall protection circuitry |
| <b>Type and Quality of LED's:</b>      | 10 High Flux LED's<br>P-Vex lens technology<br>8° beam angle<br>Anodized Aluminum heat sink w/liquid powder-cast finish  |
| <b>Peak Beam Intensity:</b>            | 410,000 Candela  |
| <b>Max Beam Distance:</b>              | 4,200 ft.  |
| <b>Voltage DC:</b>                     | 12V  |
| <b>Power Consumption:</b>              | 40W  |
| <b>Max Current draw:</b>               | 3.5 amps   |
| <b>Wireless Remote Controls:</b>       | Radio Frequency: 433 MHz<br>2187 programmable channels<br>Transmitter power: 2 Duracell MN21 12v batteries   |
| <b>Warranty:</b>                       | 5 Year Limited Warranty  |
| <b>Mounting Options:</b>               | Permanent Mount or Portable Magnetic Base  |
| <b>Rockguard:</b>                      | Not available for LED Styker Models  |